



# **QGIS Documentation Guidelines**

**QGIS Project**

**mar. 24, 2022**



<b>1</b>	<b>O contribuție pas cu pas</b>	<b>3</b>
1.1	Using the GitHub web interface	4
1.1.1	Fork QGIS-Documentation	4
1.1.2	Make changes	5
1.1.3	Modify files	6
1.1.4	Share your changes via Pull Request	6
1.1.5	Delete your merged branch	9
1.2	Utilizarea instrumentelor Git pentru linia de comandă	9
1.2.1	Depozitul local	10
1.2.2	Adăugarea unui alt depozit accesibil de la distanță	11
1.2.3	Update your base branch	11
1.2.4	Contribute to your production branch	12
1.2.5	Partajați Modificările Proprii	12
1.2.6	Curățarea depozitului local și a aceluia aflat la distanță	12
1.3	Lecturi suplimentare	13
<b>2</b>	<b>Writing Guidelines</b>	<b>15</b>
2.1	Scrierea Documentației	16
2.1.1	Titluri	16
2.1.2	Lists	16
2.1.3	Inline Tags	16
2.1.4	Labels/references	17
2.1.5	Figures and Images	18
2.1.6	Index	21
2.1.7	Comentarii Speciale	21
2.1.8	Secvențe De Cod	21
2.1.9	Note de subsol	22
2.2	Gestiunea Capturilor de Ecran	22
2.2.1	Adăugarea noilor capturi de ecran	22
2.2.2	Translated Screenshots	23
2.3	Documentarea Algoritmilor Processing	23
<b>3</b>	<b>Scrierea codului în Cartea de rețete PyQGIS</b>	<b>27</b>
3.1	How to write testable code snippets	27
3.1.1	Doctest sphinx directives	27
3.1.2	Grouping tests	29
3.2	How to test snippets on your local machine	29
<b>4</b>	<b>Ghidul traducerilor</b>	<b>31</b>
4.1	Procesul de traducere	31
4.2	Traducerea unui fișier	32

4.2.1	Traducerea pe Transifex . . . . .	32
4.2.2	Traducere în Qt Linguist . . . . .	34
4.2.3	Traduceți un manual . . . . .	36
4.2.4	Sumarul regulilor pentru traducere . . . . .	37
<b>5</b>	<b>Substituții</b>	<b>39</b>
5.1	Folosire . . . . .	40
5.2	Substituții comune . . . . .	40
5.2.1	Pictogramele platformelor . . . . .	40
5.2.2	Elementele meniului . . . . .	41
5.3	Pictogramele butoanelor barei de instrumente . . . . .	42
5.3.1	Gestiunea straturilor și a ansamblului general . . . . .	42
5.3.2	Fișier . . . . .	43
5.3.3	Editare . . . . .	43
5.3.4	Rezultatul identității . . . . .	43
5.3.5	Digitizare simplă și avansată . . . . .	44
5.3.6	Explorarea hărții și a atributelor . . . . .	45
5.3.7	Selecția și Expresiile . . . . .	45
5.3.8	Etichetele și Diagramele . . . . .	46
5.3.9	Decorațiuni . . . . .	46
5.3.10	Ajutorul . . . . .	46
5.3.11	Culori . . . . .	47
5.4	Alte pictograme de bază . . . . .	47
5.5	Tabela de atribute . . . . .	48
5.6	Proiecții și Georeferențiere . . . . .	48
5.7	Print Layout . . . . .	48
5.8	Layer Properties . . . . .	50
5.9	Plugin-uri . . . . .	51
5.9.1	Procesare . . . . .	51
5.9.2	Various Core Plugins . . . . .	51
5.9.3	Integrare GRASS . . . . .	52

Documentația QGIS se construiește în mod automat pe server, la orele 0, 8am, 4pm PDT (Pacific Time). Starea curentă se poate observa la <https://docs.qgis.org>.

Fișierele sursă ale documentației QGIS sunt disponibile la <https://github.com/qgis/QGIS-Documentation>. În principal, pentru scrierea documentației QGIS se folosește sintaxa formatului reStructuredText (reST), cu excepția unor script-uri din bara de instrumente Sphinx, dedicate post-procesării fișierelor HTML. Pentru informații generale despre aceste instrumente, consultați <http://docutils.sourceforge.net/docs/ref/rst/restructuredtext.html> sau <https://www.sphinx-doc.org/en/master/usage/restructuredtext/basics.html>.

Următoarele capitole vă arată:

- cum să gestionați fișierele sursă ale documentației folosind sistemul `git` și platforma `GitHub` pe care sunt stocate
- cum să modificați textele și să pregătiți capturile de ecran... într-un mod adecvat
- cum să efectuați partajarea și să vă asigurați că modificările sunt transmise documentelor oficiale.

Pentru a cunoaște regulile generale privind contribuția la proiectul QGIS, ați putea utiliza informațiile din secțiunea [Implicați-vă în Comunitatea QGIS](#).



# CAPITOLUL 1

---

## O contribuție pas cu pas

---

- *Using the GitHub web interface*
  - *Fork QGIS-Documentation*
  - *Make changes*
    - \* *Alternative 1: Use the Edit on GitHub shortcut*
    - \* *Alternative 2: Create an ad hoc branch in your documentation repository*
  - *Modify files*
  - *Share your changes via Pull Request*
    - \* *Start a new pull request*
    - \* *Compare changes*
    - \* *Describe your pull request*
    - \* *Review and comment pull request*
    - \* *Make corrections*
  - *Delete your merged branch*
- *Utilizarea instrumentelor Git pentru linia de comandă*
  - *Depozitul local*
  - *Adăugarea unui alt depozit accesibil de la distanță*
  - *Update your base branch*
  - *Contribute to your production branch*
  - *Partajați Modificările Proprii*
  - *Curățarea depozitului local și a aceluia aflat la distanță*
- *Lecturi suplimentare*

---

**Notă:** Cu toate că pentru a demonstra procesul se folosește Documentația QGIS, comenzile și etapele prezentate

---

mai jos se aplică întregului site QGIS.

---

If you are reading these lines, it is certainly because you are willing to contribute to writing QGIS documentation and are looking for a how-to. You have come to the right place! The current document will guide you through the different ways to achieve this objective, showing you the main steps to follow, the tricks you can use and the traps you should be aware of.

For any help, do not hesitate to either ask in a comment on the issue report you are trying to fix or write to the [QGIS-community-team list](#). More details at [Get involved in documentation](#).

Let's now dive into the process.

Documentation sources are stored using the git version control system and are available on GitHub at <https://github.com/qgis/QGIS-Documentation>. A list of issues to fix and features to explain can be found at <https://github.com/qgis/QGIS-Documentation/issues>.

---

**Sfat:** If you are a first-time contributor and do not know where to start from, you may be interested in tackling our [welcoming reports](#).

---

There are two main ways, not mutually exclusive, to modify the files:

1. *Using the GitHub web interface*
2. *Using Git command line tools.*

## 1.1 Using the GitHub web interface

The GitHub web interface allows you to do the following:

- edit files
- preview and commit your changes
- make a pull request to have your changes inserted into the main repository
- create, update, or delete branches

If you are not yet familiar with git and GitHub vocabulary, you may want to read the GitHub [Hello-world](#) project to learn some basic vocabulary and actions that will be used below.

---


### Notă: If you are fixing a reported issue

If you are making changes to fix an [issue](#), add a comment to the issue report to assign it to yourself. This will prevent more than one person from working on the same issue.

---

### 1.1.1 Fork QGIS-Documentation

Assuming you already have a [GitHub account](#), you first need to fork the source files of the documentation.

Navigate to the [QGIS-Documentation repository](#) page and click on the  button in the upper right corner.

In your GitHub account you will find a QGIS-Documentation repository (<https://github.com/<YourName>/QGIS-Documentation>). This repository is a copy of the official QGIS-Documentation repository where you have full write access and you can make changes without affecting the official documentation.





## 1.1.2 Make changes

There are different ways to contribute to QGIS documentation. We show them separately below, but you can switch from one process to the other without any harm.

### Alternative 1: Use the `Edit on GitHub` shortcut

Pages on the QGIS documentation website can be edited quickly and easily by clicking on the `Edit on GitHub` link at the top right of each page.

1. This will open the file in the `qgis:master` branch with a message at the top of the page telling you that you don't have write access to this repo and your changes will be applied to a new branch of your repository.
2. Do your changes. Since the documentation is written using the reStructureText syntax, depending on your changes, you may need to rely on the *writing guidelines*.
3. When you finish, make a short comment about your changes and click on *Propose changes*. This will generate a new branch (`patch-xxx`) in your repository.
4. After you click on *Propose changes*, github will navigate to the *Comparing changes* page.
  - If you're done making changes, skip to *Compare changes* in the *Share your changes via Pull Request* section below.
  - If there are additional changes that you want to make before submitting them to QGIS, follow these steps:
    1. Navigate to your fork of QGIS-Documentation (<https://github.com/<YourName>/QGIS-Documentation>)
    2. Click on  and search for the `patch-xxx` branch. Select this patch branch. The  button will now say *Branch: patch-xxx*
    3. Jump down to *Modify files* below.



---

**Notă:** The `Edit on GitHub` shortcut is also available in the drop-down menu at the bottom of the left sidebar.

---

### Alternative 2: Create an ad hoc branch in your documentation repository

You can edit files directly from your fork of the QGIS Documentation.

Click on  in the upper left corner of your forked QGIS- Documentation repository and enter a unique name in the text field to create a new `branch`. The name of the new branch should relate to the problem you intend to fix. The  button should now say *Branch: branch\_name*

---

#### **Sfat:** Do your changes in an ad hoc branch, never in the `master` branch

By convention, avoid making changes in your `master` branch except when you merge the modifications from the `master` branch of `qgis/QGIS-Documentation` into your copy of the QGIS-Documentation repository. Separate branches allow you to work on multiple problems at the same time without interfering with other branches. If you make a mistake you can always delete a branch and start over by creating a new one from the `master` branch.

---

### 1.1.3 Modify files

1. Browse the source files of your fork of QGIS-Documentation to the file that needs to be modified
2. Make your modifications following the *writing guidelines*
3. When you finish, navigate to the **Commit Changes** frame at the bottom of the page, make a short comment about your changes, and click on *Commit Changes* to commit the changes directly to your branch. Make sure *Commit directly to the branch\_name branch.* is selected.
4. Repeat the previous steps for any other file that needs to be updated to fix the issue

### 1.1.4 Share your changes via Pull Request

You need to make a pull request to integrate your changes into the official documentation.

---

**Notă:** If you used an `Edit on GitHub` link

After you commit your changes GitHub will automatically open a new page comparing the changes you made in your `patch-xxx` branch to the `qgis/QGIS-Documentation` master branch.

Skip to *Step 2* below.

---

#### Start a new pull request

Navigate to the main page of the `QGIS-Documentation` repository and click on *New pull request*.

#### Compare changes

If you see two dialog boxes, one that says `base:master` and the other `compare:branch_name` (see figure), this will only merge your changes from one of your branches to your master branch. To fix this click on the *compare across forks* link.

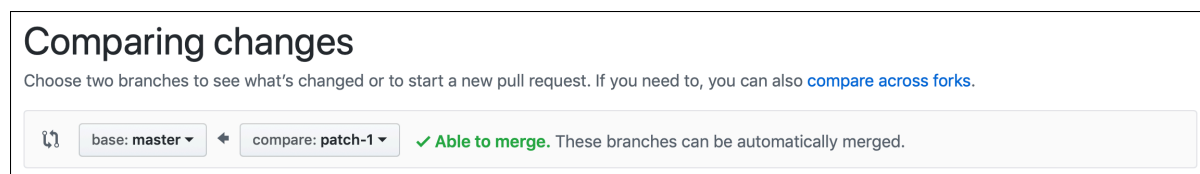


Fig. 1.1: If your *Comparing changes* page looks like this, click on the *compare across forks* link.

You should see four drop-down menus. These will allow you to compare the changes that you have made in your branch with the master branch that you want to merge into. They are:

- **base fork:** the fork that you want to merge your changes into
- **base:** the branch of the base fork that you want to merge your changes into
- **head fork:** the fork that has changes that you want to incorporate into the base fork
- **compare:** the branch with those changes

Select `qgis/QGIS-Documentation` as the base fork with `master` as base, set the head fork to your repository `<YourName>/QGIS-Documentation`, and set compare to your modified branch.

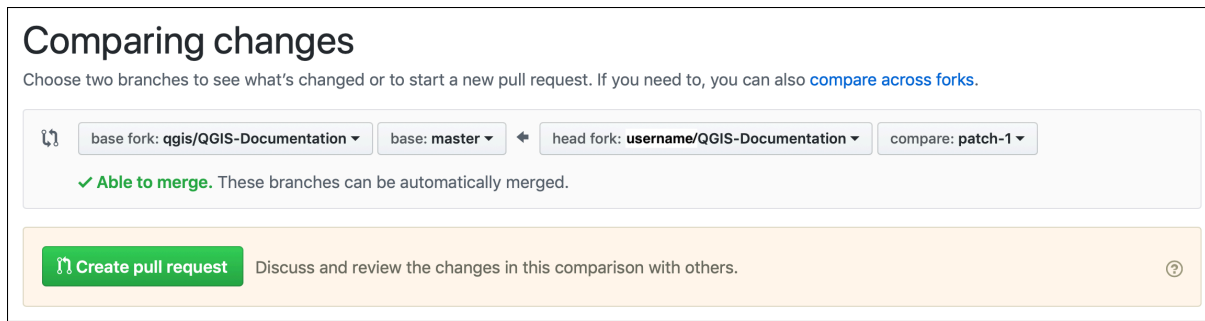


Fig. 1.2: Comparing changes between qgis/QGIS-Documentation and your repository

A green check with the words **Able to merge** shows that your changes can be merged into the official documentation without conflicts.

Click the *Create pull request* button.

**Atenționare:** If you see **✗ Can't automatically merge.**

This means that there are **conflicts**. The files that you are modifying are not up to date with the branch you are targeting because someone else has made a commit that conflicts with your changes. You can still create the pull request but you'll need to fix any **conflicts** to complete the merge.

**Sfat:** Though being translated, the **latest version** of QGIS documentation is still maintained and existing issues are fixed. If you are fixing issues for a different release, change **base** from `master` to the appropriate `release_...` branch in the steps above.

## Describe your pull request

A text box will open: fill in any relevant comments for the issue you are addressing.

If this relates to a particular **issue**, add the issue number to your comments. This is done by entering `#` and the issue number (e.g. `#1234`). If preceded by terms like `fix` or `close`, the concerned issue will be closed as soon as the pull request is merged.

Add links to any documentation pages that you are changing.



Click on *Create pull request*.

## Review and comment pull request

As seen above, anyone can submit modifications to the documentation through pull requests. Likewise anyone can review pull requests with questions and **comments**. Perhaps the writing style doesn't match the project guidelines, the change is missing some major details or screenshots, or maybe everything looks great and is in order. Reviewing helps to improve the quality of the contribution, both in form and substance.

To review a pull request:

1. Navigate to the [pull requests page](#) and click on the pull request that you want to comment on.
2. At the bottom of the page you will find a text box where you can leave general comments about the pull request.
3. To add comments about specific lines,


1. Click on  Files changed and find the file you want to comment on. You may have to click on *Display the source diff* to see the changes.
2. Scroll to the line you want to comment on and click on the . That will open a text box allowing you to leave a comment.

Specific line comments can be published either:

- as single comments, using the *Add single comment* button. They are published as you go. Use this only if you have few comments to add or when replying to another comment.
- or as part of a review, pressing the *Start a review* button. Your comments are not automatically sent after validation, allowing you to edit or cancel them afterwards, to add a summary of the main points of the review or global instructions regarding the pull request and whether you approve it or not. This is the convenient way since it's more flexible and allows you to structure your review, edit the comments, publish when you are ready and send a single notification to the repository followers and not one notification for each comment. Get [more details](#).




Fig. 1.3: Commenting a line with a change suggestion

Line comments can embed suggestions that the pull request writer can apply to the pull request. To add a suggestion, click the  Insert a suggestion button on top of the comment text box and modify the text within the suggestion block.

---

### Sfat: Prefer committing suggestions to your pull request as a batch

As a pull request author, when directly incorporating reviewers» feedback in your pull request, avoid using the *Commit suggestion* button at the bottom of the comment when you have many suggestions to address and prefer adding them as a batch commit, that is:

1. Switch to the  Files changed tab
2. Press *Add suggestion to batch* for each rewording you'd like to include. You will see a counter increasing as you go.
3. Press any of the *Commit suggestions* button when you are ready to apply the suggestions to your pull request, and enter a message describing the changes.

This will add all the modifications to your branch as a single commit, resulting in a more legible history of changes and less notifications for the repository followers. Incidentally, proceeding as this will also save you many clicks.



---

## Make corrections

A new pull request will automatically be added to the [Pull requests list](#). Other editors and administrators will review your pull request and they may make suggestions or ask for corrections.

A pull request will also trigger automated build checks (eg, for rst formatting, python code syntaxes), and reports are displayed at the bottom of the page. If an error is found, a red cross will appear next to your commit. Click on the red cross or on `Details` in the summary section at the bottom of the pull request page to see the details of the error. You'll have to fix any reported errors or warnings before your changes are committed to the `qgis/QGIS-Documentation` repository.

You can make modifications to your pull request until it is merged with the main repository, either to improve your request, to address requested modifications, or to fix a build error.

To make changes click on the  `Files changed` tab in your pull request page and click the pencil button  next to the filename that you want to modify.


Any additional changes will be automatically added to your pull request if you make those changes to the same branch that you submitted in your pull request. For this reason, you should only make additional changes if those changes relate to the issue that you intend to fix with that pull request.

If you want to fix another issue, create a new branch for those changes and repeat the steps above.

An administrator will merge your contribution after any build errors are corrected, and after you and the administrators are satisfied with your changes.

### 1.1.5 Delete your merged branch

You can delete the branch after your changes have been merged. Deleting old branches saves you from having unused and outdated branches in your repository.

1. Navigate to your fork of the QGIS-Documentation repository (<https://github.com/<YourName>/QGIS-Documentation>).
2. Click on the `Branches` tab. Below `Your branches` you'll see a list of your branches.
3. Click on the  `Delete this branch` icon to delete any unwanted branches.

## 1.2 Utilizarea instrumentelor Git pentru linia de comandă

The GitHub web interface is an easy way to update the QGIS-documentation repo with your contributions, but it doesn't offer tools to:

- group your commits and clean your change history
- fix possible conflicts with the main repo
- build the documentation to test your changes

You need to [install git](#) on your hard drive in order to get access to more advanced and powerful tools and have a local copy of the repository. Some basics you may often need are exposed below. You'll also find rules to care about even if you opt for the web interface.

În exemplele de cod de mai jos, liniile care încep cu `$` prezintă comenzile pe care ar trebui să le introduceți, în timp ce `#` prefixează comentariile.

### 1.2.1 Depozitul local

Now you are ready to get a local clone of **your** QGIS-Documentation repository.

You can clone your QGIS repository using the web URL as follows:

```
# move to the folder in which you intend to store the local repository
$ cd ~/Documents/Development/QGIS/
$ git clone https://github.com/<YourName>/QGIS-Documentation.git
```

The former command line is simply an example. You should adapt both the path and the repository URL, replacing `<YourName>` with your github user name.

Check the following:

```
# Enter the local repository
$ cd ./QGIS-Documentation
$ git remote -v
origin https://github.com/<YourName>/QGIS-Documentation.git (fetch)
origin https://github.com/<YourName>/QGIS-Documentation.git (push)
$ git branch
* master
```

- *originea* este numele depozitului dumneavoastră, accesibil de la distanță, cu Documentație QGIS.
- *master* este ramura principală, implicită. Nu ar trebui să introduceți codul dvs. aici! **Niciodată!**

Alternatively you can clone your QGIS repository using the SSH protocol:

```
# move to the folder in which you intend to store the local repository
$ cd ~/Documents/Development/QGIS/
$ git clone git@github.com:<YourName>/QGIS-Documentation.git
```

---

#### Sfat: Permission denied (publickey) error?

If you get a Permission denied (publickey) error with the former command, there may be a problem with your SSH key. See [GitHub help](#) for details.

---

Check the following if you used the SSH protocol:

```
# Enter the local repository
$ cd ./QGIS-Documentation
$ git remote -v
origin git@github.com:<YourName>/QGIS-Documentation.git (fetch)
origin git@github.com:<YourName>/QGIS-Documentation.git (push)
$ git branch
* master
```

You can start to work here but in the long term process you will get a lot of issues when you will push your contribution (called Pull Request in github process) as the master branch of the qgis/QGIS-Documentation repository will diverge from your local/remote repository. You then need to keep track of the main remote repository and work with branches.

## 1.2.2 Adăugarea unui alt depozit accesibil de la distanță

Pentru a putea urmări activitatea din proiectul principal, adăugați un nou depozit, accesibil de la distanță, în depozitul local. Acest nou depozit va fi depozitul Documentației QGIS, al proiectului QGIS:

```
$ git remote add upstream https://github.com/qgis/QGIS-Documentation.git
$ git remote -v
origin https://github.com/<YourName>/QGIS-Documentation.git (fetch)
origin https://github.com/<YourName>/QGIS-Documentation.git (push)
upstream https://github.com/qgis/QGIS-Documentation.git (fetch)
upstream https://github.com/qgis/QGIS-Documentation.git (push)
```

Similarly, you can use the SSH protocol to add a remote repository in your local repository:

```
$ git remote add upstream git@github.com:qgis/QGIS-Documentation.git
$ git remote -v
origin git@github.com:<YourName>/QGIS-Documentation.git (fetch)
origin git@github.com:<YourName>/QGIS-Documentation.git (push)
upstream git@github.com:qgis/QGIS-Documentation.git (fetch)
upstream git@github.com:qgis/QGIS-Documentation.git (push)
```

Deci, acum aveți posibilitatea de a alege între două depozite accesibile de la distanță:

- *origin* to push your local branch in **your** remote repository
- *upstream* to merge (if you have right to do so) your contribution to the official one OR to update your master branch of local repository from the master branch of the official repository.

---

**Notă:** *upstream* is just a label, a kind of standard name but you can call it as you want.

---

## 1.2.3 Update your base branch

Before working on a new contribution, you should always update your master branch in your local repository. Assuming you are willing to push changes to the testing documentation, run the following command lines:

```
# switch to master branch (it is easy to forget this step!)
$ git checkout master
# get "information" from the master branch in the upstream repository
# (aka qgis/QGIS-Documentation's repository)
$ git fetch upstream master
# merge update from upstream/master to the current local branch
# (which should be master, see step 1)
$ git merge upstream/master
# update your remote repository (aka <YourName>/QGIS-Documentation)
$ git push origin master
```

Now you have your local and remote repositories which both have their `master` branch up to date with the official `master` branch of `QGIS-Documentation`. You can start to work on your contribution.

---

**Notă:** Switch the branch if you wish to contribute to released doc

Along with the testing documentation, we continue to fix issues in the [latest release](#), meaning that you can also contribute to it. Follow the previous section sample code, replacing `master` with the corresponding branch of the latest documentation.

---

### 1.2.4 Contribute to your production branch

Now that your base branch is updated, you need to create a dedicated branch in which you add your contribution. Always work on a branch other than the base branch! Always!

```
# Create a new branch
$ git checkout -b myNewBranch
# checkout means go to the branch
# and -b flag creates a new branch if needed, based on current branch
# Let's check the list of existing branches (* indicates the current branch)
$ git branch
master
release_2.18
...
* myNewBranch
# You can now add your contribution, by editing the concerned file(s)
# with any application (in this case, vim is used)
$ vim myFile
# once done
$ git add myFile
$ git commit
```

Few words about commit/push commands:

- try to commit only one contribution (atomic change) i.e. address only one issue
- try to explain carefully what you change in the title of your commit and in the description. The first line is a title and should start by an upper case letter and have 80 characters length, don't end with a .. Be concise. Your description can be longer, end with a . and you can give much more details.
- use a # with a number to refer to an issue. Prefix with `Fix` if you fix the ticket: your commit will close the ticket.

Now that your changes are saved and committed in your local branch, you need to send them to your remote repository in order to create pull request:

```
$ git push origin myNewBranch
```

### 1.2.5 Partajați Modificările Proprii

Now you can go to your github repository and *create a Pull Request* as exposed in a previous section. Ensure you create a PR from your branch to the remote branch you are targeting in the official QGIS-Documentation repository.

### 1.2.6 Curățarea depozitului local și a aceluia aflat la distanță

După ce PR-ul a fost încorporat în Documentația QGIS oficială, puteți șterge ramura. În cazul în care lucrați mult în acest mod, în câteva săptămâni, vă veți alege cu o mulțime de ramuri nefolositoare. De aceea, pentru a păstra curat depozitul curățați-l în acest fel:

```
# delete local branch
$ git branch -d myNewBranch
# Remove your remote myNewBranch by pushing nothing to it
$ git push origin :myNewBranch
```

Și nu uitați să actualizați ramura `master` din depozit local!



## 1.3 Lecturi suplimentare

- Other than the Github web interface and the git command line tools exposed above, there are also [GUI applications](#) you can use to create and manage your contributions to the documentation.
- When the changes in the pull request are conflicting with recent changes pushed to the target branch, the conflicts need to be resolved before a merge is possible:
  - if the conflict relates to few competing lines, a *Resolve conflicts* button is available in the Github pull request page. Press the button and resolve the issue as explained at <https://help.github.com/articles/resolving-a-merge-conflict-on-github/>
  - if the conflict involves files renaming or removal, then you'd need to resolve the conflict using git command lines. Typically, you have to first rebase your branch over the target branch using `git rebase targetBranch` call and fix the conflicts that are reported. Read more at <https://help.github.com/articles/resolving-a-merge-conflict-using-the-command-line/>
- Sometimes, at the end of the proofreading process, you may end up with changes split into multiple commits that are not necessarily worth it. Git command lines help you squash these commits to a smaller number and more meaningful commit messages. Some details at <https://help.github.com/articles/using-git-rebase-on-the-command-line/>



- *Scrierea Documentației*
  - *Titluri*
  - *Lists*
  - *Inline Tags*
  - *Labels/references*
  - *Figures and Images*
    - \* *Imagini*
    - \* *Înlocuire*
    - \* *Figuri*
    - \* *Tabele*
  - *Index*
  - *Comentarii Speciale*
  - *Secvențe De Cod*
  - *Note de subsol*
- *Gestiunea Capturilor de Ecran*
  - *Adăugarea noilor capturi de ecran*
  - *Translated Screenshots*
- *Documentarea Algoritmilor Processing*

In general, when creating reST documentation for the QGIS project, please follow the [Python documentation style guidelines](#). For convenience, we provide a set of general rules we rely on for writing QGIS documentation below.

## 2.1 Scrierea Documentației

### 2.1.1 Titluri

Fiecărei pagini web îi corespunde un fișier `.rst`.

Secțiunile utilizate pentru structurarea textului sunt identificate printr-un titlu, care este subliniat (și supraliniat pentru primul nivel). Titlurile de același nivel trebuie să folosească caractere identice pentru subliniere. În Documentația QGIS, ar trebui să utilizați următoarele stiluri pentru capitol, secțiune, subsecțiune și minisețiune.

```

*****
Chapter
*****

Section
=====

Subsection
-----

Minisec
.....

Subminisec
^^^^^^^^^^
    
```

### 2.1.2 Lists

Lists are useful for structuring the text. Here are some simple rules common to all lists:

- Start all list items with a capital letter
- Do not use punctuation after list items that only contain a single simple sentence
- Use period ( . ) as punctuation for list items that consist of several sentences or a single compound sentence

### 2.1.3 Inline Tags

You can use tags to emphasize items.

- **Menu GUI:** to mark a complete sequence of menu selections, including selecting submenus and choosing a specific operation, or any subsequence of such a sequence.

```
:menuselection:`menu --> submenu`
```

- **Dialogs and Tab titles:** Labels presented as part of an interactive user interface including window titles, tab titles, button and option labels.

```
:guilabel:`title`
```

- **Filenames and directories**

```
:file:`README.rst`
```

- **Icons with popup text**

```
|icon| :sup:`popup_text`
```

(vedeți *imaginea* de mai jos).

- **Keyboard shortcuts**

```
:kbd:`Ctrl+B`
```

will show Ctrl+B

When describing keyboard shortcuts, the following conventions should be used:

- Letter keys are displayed using uppercase: S
- Special keys are displayed with an uppercase first letter: Esc
- Key combinations are displayed with a + sign between keys, without spaces: Shift+R

- **Text specific utilizatorului**

```
`label`
```

## 2.1.4 Labels/references

anchors inside the text can be used to create hyperlinks to sections or pages.

Exemplul de mai jos creează ancora unei secțiuni (ex.: titlul Etichetei/referinței)

```
.. my_anchor:  
  
Label/reference  
-----
```

Pentru a apela referința din **aceeași pagină**, folosiți

```
see my_anchor_ for more information.
```

ceea ce va returna:

vedeți *my\_anchor* pentru mai multe informații.

Notice that it will jump to the line/thing following the «anchor». You do not need to use apostrophes, but you do need to have empty lines after the anchor.

O altă modalitate de a sări în același loc **de oriunde din documentație** este de a utiliza rolul `:ref:`.

```
see :ref:`my_anchor` for more information.
```

which will create a link with the caption instead (in this case the title of this section!):

vedeți *Labels/references* pentru mai multe informații.

So, reference 1 (*my\_anchor*) and reference 2 (*Labels/references*). Because the reference often displays a full caption, it is not really necessary to use the word *section*. Note that you can also use a custom caption to describe the reference:

```
see :ref:`Label and reference <my_anchor>` for more information.
```

which returns:

vedeți *Eticheta și referința* pentru mai multe informații.

### 2.1.5 Figures and Images

#### Imagini

Pentru a insera o imagine, utilizați

```
.. figure:: /static/common/logo.png  
   :width: 10 em
```

ceea ce returnează



#### Înlocuire


You can put an image inside text or add an alias to use everywhere. To use an image inside a paragraph, first create an alias in the `source/substitutions.txt` file:

```
.. |nice_logo| image:: /static/common/logo.png  
   :width: 1 em
```

and then call it in your paragraph:

```
My paragraph begins here with a nice logo |nice_logo|.
```

This is how the example will be displayed:

My paragraph begins here with a nice logo .

To allow preview rendering in GitHub that is as close as possible to HTML rendering, you will also need to add the image replacement call at the end of the file you changed. This can be done by copy-pasting it from `substitutions.txt` or by executing the `scripts/find_set_subst.py` script.

---

**Notă:** Currently, to ensure consistency and help in the use of QGIS icons, a list of aliases is built and available in the *Substituții* chapter.

---

#### Figuri

```
.. _figure_logo:  
  
.. figure:: /static/common/logo.png  
   :width: 20 em  
   :align: center  
  
   A caption: A logo I like
```

Rezultatul arată în felul următor:



Fig. 2.1: Un text explicativ: Un logo care-mi place

To avoid conflicts with other references, always begin figure anchors with `_figure_` and use terms that easily connect to the figure caption. While only the centered alignment is mandatory for the image, feel free to use any other options for figures (such as `width`, `height`, `scale...`) if needed.

The scripts will insert an automatically generated number before the caption of the figure in the generated HTML and PDF versions of the documentation.

Pentru a utiliza un text explicativ (*vedeți Textul explicativ*), inserați textul indentat după o linie vidă, în blocul figurii.

A figure can be referenced using the reference label like this:

```
see :numref:`figure_logo`
```

renders like this:

see Fig. 2.1

This is the preferred way of referencing figures.

---

**Notă:** For `:numref:` to work, the figure **must have a caption**.

---

Avoid using `:ref:` instead of `:numref:` for reference, since this returns the full caption of the image.

```
see :ref:`figure_logo`
```

renders like this:

vedeți ref:figure\_logo

## Tabele

A simple table can be coded like this

```
=====
x          y          z
=====
1          2          3
4          5
=====
```

It will render like this:

x	y	z
1	2	3
4		5

Use a \ (backslash) followed by an empty space to leave an empty space.



You can also make more complicated tables and reference them:

```
.. my_drawn_table:
+-----+-----+
| Windows      | macOS      |
+-----+-----+
| |win|        | |osx|      |
+-----+-----+
| and of course not to forget |nix| |
+-----+-----+

My drawn table, mind you this is unfortunately not regarded as a caption

You can reference it like this: my_drawn_table.
```

Rezultatul:

Windows	macOS
	X
și, desigur, să nu uităm de 	

My drawn table, mind you this is unfortunately not regarded as a caption

Puteți să-l referențiați la fel ca în *my\_drawn\_table*.

For even more complex tables, it is easier to use `list-table`:

```
.. list-table::
  :header-rows: 1
  :widths: 20 20 20 40

  * - What
    - Purpose
    - Key word
    - Description
  * - Test
    - ``Useful test``
    - complexity
    - Geometry. One of:

      * Point
      * Line
```

Rezultatul:

What	Scop	Key word	Descriere
<b>Test</b>	Useful test	complexity	Geometry. One of: <ul style="list-style-type: none"> <li>• Punct</li> <li>• Line</li> </ul>



## 2.1.6 Index

An index is a handy way to help the reader find information in a document. QGIS documentation provides some essential indices. There are a few rules that help us provide a set of indices that are really useful (coherent, consistent and really connected to each other):

- An index should be human readable, understandable and translatable; an index can be made from many words but you should avoid any unneeded `_`, `-`... characters to link them i.e., `Loading layers` instead of `loading_layers` or `loadingLayers`.
- Capitalize only the first letter of the index unless the word has a particular spelling. E.g., `Loading layers`, `Atlas generation`, `WMS`, `pgsql2shp`.
- Keep an eye on the existing [Index list](#) in order to reuse the most convenient expression with the right spelling and avoid unnecessary duplicates.

Several index tags exist in RST. You can use the inline `:index:` tag within normal text:

```
QGIS can load several :index:`Vector formats` supported by GDAL/OGR ...
```

Or you can use the `.. index::` block-level markup which links to the beginning of the next paragraph. Because of the rules mentioned above, it is recommended to use the block-level tag:

```
.. index:: WMS, WFS, Loading layers
```

It is also recommended to use index parameters such as `single`, `pair` and `see`, in order to build a more structured and interconnected index table. See [Index generating](#) for more information on index creation.

## 2.1.7 Comentarii Speciale

Sometimes, you may want to emphasize some points of the description, either to warn, remind or give some hints to the user. In QGIS Documentation, we use reST special directives such as `.. warning::`, `.. seealso::``, ```.. note::` and `.. tip::`. These directives generate frames that highlight your comments. See [Paragraph Level markup](#) for more information. A clear and appropriate title is required for both warnings and tips.

```
.. tip:: **Always use a meaningful title for tips**
```

```
Begin tips with a title that summarizes what it is about. This helps
users to quickly overview the message you want to give them, and
decide on its relevance.
```

## 2.1.8 Secvențe De Cod

You may also want to give examples and insert code snippets. In this case, write the comment below a line with the `::` directive inserted. For a better rendering, especially to apply color highlighting to code according to its language, use the code-block directive, e.g. `.. code-block:: xml`. More details at [Showing code](#).

---

**Notă:** While texts in note, tip and warning frames are translatable, be aware that code block frames do not allow translation. So avoid comments not related to the code and keep comments as short as possible.

---

### 2.1.9 Note de subsol

Please note: Footnotes are not recognized by any translation software and it is also not converted to pdf format properly. So, if possible, don't use footnotes within any documentation.

This is for creating a footnote (showing as example<sup>1</sup>)

```
blabla [1]_
```

Care va indica:

## 2.2 Gestiunea Capturilor de Ecran

### 2.2.1 Adăugarea noilor capturi de ecran

Here are some hints to create new, nice looking screenshots. The images should be placed in an image (`img/`) folder that is located in the same folder as the referencing `.rst` file.

- You can find some prepared QGIS-projects that are used to create screenshots in the `./qgis-projects` folder of this repository. This makes it easier to reproduce screenshots for the next version of QGIS. These projects use the QGIS [Sample Data](#) (aka Alaska Dataset), which should be placed in the same folder as the QGIS-Documentation Repository.
- Reduce the window to the minimal space needed to show the feature (taking the whole screen for a small modal window > overkill)
- The less clutter, the better (no need to activate all the toolbars)
- Don't resize them in an image editor; the size will be set into the `.rst` files if necessary (downscaling the dimensions without properly upping the resolution > ugly)
- Cut the background
- Make the top corners transparent if the background is not white
- Set print size resolution to 135 dpi (e.g. in Gimp set the print resolution *Image ► Print size* and save). This way, images will be at original size in html and at a good print resolution in the PDF. You can also use ImageMagick convert command to do a batch of images:

```
convert -units PixelsPerInch input.png -density 135 output.png
```

- Save them as `.png` (to avoid `.jpeg` artifacts)
- The screenshot should show the content according to what is described in the text

---

**Sfat:** If you are on Ubuntu, you can use the following command to remove the global menu function and create smaller application screens with menus:

```
sudo apt autoremove appmenu-gtk appmenu-gtk3 appmenu-qt
```

---

<sup>1</sup> Actualizări ale plugin-urilor de bază

## 2.2.2 Translated Screenshots

Here are some additional hints for those that want to create screenshots for a translated user guide:

Translated images should be placed in a `img/<your_language>/` folder. Use the same filename as the english «original» screenshot.

## 2.3 Documentarea Algoritmilor Processing

If you want to write documentation for Processing algorithms, consider these guidelines:

- Processing algorithm help files are part of QGIS User Guide, so use the same formatting as User Guide and other documentation.
- Each algorithm documentation should be placed in the corresponding **provider** folder and **group** file, e.g. the algorithm *Voronoi polygon* belongs to the *QGIS* provider and to the group *vectorgeometry*. So the correct file to add the description is: `source/docs/user_manual/processing_algs/qgis/vectorgeometry.rst`.

---

**Notă:** Before starting to write the guide, check if the algorithm is already described. In this case, you can enhance the existing description.

---

- It is **extremely** important that each algorithm has an *anchor* that corresponds to the provider name + the unique name of the algorithm itself. This allows the Help button to open the Help page of the correct section. The anchor should be placed **above** the title, e.g. (see also the *Labels/references* section):

```
.. _qgisvoronoipolygons:
Voronoi polygons
-----
```

To find out the algorithm name you can just hover the mouse on the algorithm in the Processing toolbox.

- Avoid using „This algorithm does this and that...” as the first sentence in the algorithm description. Try to use more general expressions like:

```
Takes a point layer and generates a polygon layer containing the...
```











- Avoid describing what the algorithm does by replicating its name and please don't replicate the name of the parameter in the description of the parameter itself. For example if the algorithm is *Voronoi polygon* consider to describe the *Input layer* as *Layer* to calculate the polygon from.
- Indicate in the description whether the algorithm has a default shortcut in QGIS or supports in-place editing.
- Add images! A picture is worth a thousand words! Use `.png` format and follow the general guidelines for documentation (see the *Figures and Images* section for more info). Put the image file in the correct folder, i.e. the `img` folder next to the `.rst` file you are editing.
- If necessary, add links in the „See also” section that provide additional information about the algorithm (e.g., publications or web-pages). Only add the „See also” section if there is really something to see. As a good practice, the „See also” section can be filled with links to similar algorithms.
- Give clear explanation for algorithm parameters and outputs: take inspiration from existing algorithms.
- Avoid duplicating detailed description of algorithm options. Add this information in the parameter description.
- Avoid adding information about the vector geometry type in the algorithm or parameter description, as this information is already available in the parameter descriptions.
- Add the default value of the parameter, e.g.:

```

* - **Number of points**
- ``NUMBER_OF_POINTS``
- [number]

Default: 1
- Number of points to create
    
```

- Describe the *type* of input supported the parameters. There are several types available you can pick one from:

Parameter/Output type	Descriere	Visual indicator
Point vector layer	vector: point	
Line vector layer	vector: line	
Polygon vector layer	vector: polygon	
Generic vector layer	vector: any	
Vector field numeric	tablefield: numeric	<b>1.2</b>
Vector field string	tablefield: string	<b>abc</b>
Vector field generic	tablefield: any	
Raster layer	raster	
Raster band	raster band	
HTML file	html	
Table layer	table	
Expression	expression	
Point geometry	coordinates	
Extinderea	extent	
CRS	crs	
Enumeration	enumeration	
List	list	
Numărul	number	1,00 
Șirul	string	Display name <input type="text" value="lakes.shp"/>
Boolean	boolean	
Folder path	folder	
Fișier	file	
Matrix	matrix	
Strat	layer	
Same output type as input type	same as input	
Definition	definition	
Punct	point	
MultipleLayers	multipleLayers	
Intervalul	range	
AuthConfig	authconfig	
Mesh	mesh	
Layout	layout	
LayoutItem	layoutitem	
Color	color	
Scale	scale	

- Study an existing and well documented algorithm, and copy all the useful layouts.
- When you are finished, just follow the guidelines described in *O contribuție pas cu pas* to commit your changes and make a Pull Request

Here is an example of an existing algorithm to help you with the layout and the description:

```
.. _qgiscountpointsinpolygon:
```

Count points in polygon

-----

Takes a point and a polygon layer and counts the number of points from the point layer in each of the polygons of the polygon layer.

A new polygon layer is generated, with the exact same content as the input polygon layer, but containing an additional field with the points count corresponding to each polygon.

```
.. figure:: img/count_points_polygon.png
   :align: center
```

The labels in the polygons show the point count

An optional weight field can be used to assign weights to each point. Alternatively, a unique class field can be specified. If both options are used, the weight field will take precedence and the unique class field will be ignored.

```
``Default menu``: :menuselection:`Vector --> Analysis Tools`
```

Parameters

.....

```
.. list-table::
   :header-rows: 1
   :widths: 20 20 20 40
```

- \* - Label
  - Name
  - Type
  - Description
- \* - **Polygons**
  - ``POLYGONS``
  - [vector: polygon]
  - Polygon layer whose features are associated with the count of points they contain
- \* - **Points**
  - ``POINTS``
  - [vector: point]
  - Point layer with features to count
- \* - **Weight field**
  - Optional
    - ``WEIGHT``
    - [tablefield: numeric]
    - A field from the layer.
    - The count generated will be the sum of the weight field of the points contained by the polygon.
- \* - **Class field**
  - Optional
    - ``CLASSFIELD``
    - [tablefield: any]
    - Points are classified based on the selected attribute and if several points with the same attribute value are within the polygon, only one of them is counted.
    - The final count of the points in a polygon is, therefore, the count of different classes that are found in it.
- \* - **Count field name**
  - ``FIELD``

(continues on next page)

(continuare din pagina precedentă)

```
- [string]

    Default: 'NUMPOINTS'
- The name of the field to store the count of points
* - **Count**
- ``OUTPUT``
- [vector: polygon]

    Default: [Create temporary layer]
- Specification of the output layer type (temporary, file,
  GeoPackage or PostGIS table).
  Encoding can also be specified.

Outputs
.....

.. list-table::
   :header-rows: 1
   :widths: 20 20 20 40

   * - Label
     - Name
     - Type
     - Description
   * - **Count**
     - ``OUTPUT``
     - [vector: polygon]
     - Resulting layer with the attribute table containing the
       new column with the points count
```

---

## Scrierea codului în Cartea de rețete PyQGIS

---

- *How to write testable code snippets*
  - *Doctest sphinx directives*
  - *Grouping tests*
- *How to test snippets on your local machine*

If you are planning to add or update some chapters of the PyQGIS-Developer-Cookbook, then you should follow some rules to enable automatic testing of the code snippets.

Testing is really important because it allows automatic checking of the code. Code snippets with errors or code that uses outdated methods will fail and the notification will help you fix the problems.

For testing, we use the [Sphinx doctest extension](#). Refer to the extension documentation for more detailed information.

### 3.1 How to write testable code snippets

Writing testable code snippets is not so different from the *old* method. Basically, you need to use a different Sphinx *directive*.

#### 3.1.1 Doctest sphinx directives

Instead of embedding the code in a `.. code-block:: python` directive (which would highlight the code syntax automatically), you now need to embed it in a `.. testcode::`. That is, instead of this:

```
.. code-block:: python

    crs = QgsCoordinateReferenceSystem("EPSG:4326")
    assert crs.isValid()
```

You now use this:

```
.. testcode::

    crs = QgsCoordinateReferenceSystem("EPSG:4326")
    assert crs.isValid()
```

After you wrote the example code, you should add some *assertion* that will evaluate the code and that will be run automatically.

In the above example, you are creating a `crs` and with `assert crs.isValid()` you **test** if it is valid. If the code has a wrong python syntax or the `crs.isValid()` returns `False`, this code snippet will fail during testing.

To successfully run the tests on snippets, you must import all the classes and declare any variables used in the code snippets. You can include those in the code snippet itself (visible in the HTML pages) or you can add them to a `.. testsetup::` directive (hidden in the HTML pages). The `.. testsetup::` needs to be placed before the `.. testcode::`:

```
.. testsetup::

    from qgis.core import QgsCoordinateReferenceSystem

.. testcode::

    crs = QgsCoordinateReferenceSystem("EPSG:4326")
    assert crs.isValid()
```

If the code snippet doesn't create objects (and therefore you cannot use something like `assert object.isValid()`), you can test the code using the `print()` method, then add the expected results within a `.. testoutput::` directive to compare the expected output:

```
.. testcode::

    print("QGIS CRS ID:", crs.srsid())
    print("PostGIS SRID:", crs.postgisSrid())

.. testoutput::

    QGIS CRS ID: 3452
    PostGIS SRID: 4326
```

By default, the content of `.. testoutput::` is shown in the HTML output. To hide it from the HTML use the `:hide:` option:

```
.. testoutput::
    :hide:

    QGIS CRS ID: 3452
    PostGIS SRID: 4326
```

---

**Notă:** If the code snippet contains any print statements, you **MUST** add a `testoutput` with the expected outputs; otherwise the test will fail.

---



### 3.1.2 Grouping tests

For each rst document, the code snippets are tested sequentially, which means you can use one `.. testsetup::` for all the following code snippets and that later snippets will have access to variables declared in earlier ones in the document.

Alternatively, you can use groups to break down the examples on the same page in different tests.

You add the code snippet to groups by adding one or more group names (separated by commas) in the respective directive:

```
.. testcode:: crs_crsfromID [, morenames]

    crs = QgsCoordinateReferenceSystem("EPSG:4326")
    assert crs.isValid()
```

The `doctest` will pick each group snippets and run them independently.

---

**Notă:** Use group names that make sense with the related content. Use something similar to `<chapter>_<subchapter>`, for example: `crs_intro`, `crs_fromwkt`. In case of failures, this will help identifying where the failures occur.

---

If you don't declare any group, the code snippet will be added to a group named `default`. If instead, you use `*` as a group name, the snippet will be used in all testing groups, something normally useful to use in the test setup:

```
.. testsetup:: *

    from qgis.core import QgsCoordinateReferenceSystem
```

## 3.2 How to test snippets on your local machine

---

**Notă:** Instructions are valid for Linux system.

---

To test Python code snippets, you need a *QGIS* installation. For this, there are many options. You can:

- Use your system *QGIS* installation with *Sphinx* from a Python virtual environment:

```
make -f venv.mk doctest
```

- Use a manually built installation of *QGIS*. You'd need to:

1. Create a custom Makefile extension on top of the `venv.mk` file, for example a `user.mk` file with the following content:

```
# Root installation folder
QGIS_PREFIX_PATH = /home/user/apps/qgis-master

include venv.mk
```

Or

```
# build output folder
QGIS_PREFIX_PATH = /home/user/dev/QGIS-build-master/output

include venv.mk
```

2. Then, use it to run target `doctest`:

```
make -f user.mk doctest
```

- Run target `doctest` inside the official *QGIS* docker image:

```
make -f docker.mk doctest
```

You have to install [Docker](#) first because this uses a docker image with QGIS in it.

- *Procesul de traducere*
- *Traducerea unui fișier*
  - *Traducerea pe Transifex*
  - *Traducere în Qt Linguist*
  - *Traduceți un manual*
  - *Sumarul regulilor pentru traducere*

Acest manual este dedicat traducătorilor. Mai întâi este explicat procesul general de realizare a unei traduceri. Mai departe, este detaliată traducerea în olandeză a unui document scris, în original, în engleză. La final sunt rezumate *Regulile de traducere*.

---

**Notă:** Deși se concentrează pe documentația QGIS, metodele și regulile descrise mai jos se aplică, de asemenea, și traducerii aplicației QGIS și a site-ului web.

---

## 4.1 Procesul de traducere

QGIS Documentation is written in English with `.rst` files. In order to provide translations:

1. A prebuild script creates translation files named `.po` files for the English language in the folder `/QGIS-Documentation/locale/en`.
2. These „originals” are then copied by the script to the `locale` folders for other languages.
3. The sentences in the `.po` files are pushed to the Transifex web platform, and made available for translators who can begin to translate from English to their language with the editor.
4. At the end of the day, a script pulls back all validated translations
5. At the next build of the documentation (which occurs at least once a day), a script reuses the sentences to create translated output

6. When afterwards an `.rst` document is updated a new `.po` file is created in the English part. The contents of this new file will be merged with already existing `.po` files for each language. This means that when a new line is added to an `.rst` document that was already translated, only the new/updated sentences are added in the translated `.po` file and needs to be translated. The amount of work for updating translations for next release should be relatively small.

---

**Notă:** The process above is the same followed to translate QGIS website, QGIS Desktop and QGIS Server. The difference with the applications is that instead of `.po` files, all the translatable strings in the `.py`, `.cpp`, `.yaml` and others... files that shape the application are pushed to and pulled from transifex as a single `.ts` file.

---

În prezent, sunt folosite două instrumente diferite pentru a efectua traducerile QGIS:

- The [Transifex web platform](#), the easiest and recommended way to translate QGIS, transparently does the process described above and pulls all the translatable texts in one place for the translator. Just pick the files you want and translate. Translated files are stored in the platform until another release is pushed.
- [Qt Linguist](#), a Qt development tool, requires the translator to pull locally the `.po` (or `.ts`) files from the source code, translate and then push back.

Rețineți că indiferent de instrumentul ales, regulile de traducere sunt aceleași.

## 4.2 Traducerea unui fișier

Pentru a explica cum funcționează traducerea, vom folosi plugin-ul Heatmap ca exemplu. În acest exemplu, îl vom traduce din engleză în olandeză, dar procedeeul va fi, practic, similar pentru traducerea în oricare altă limbă.

Sursa unui document se poate găsi aici:

```
QGIS-Documentation/source/docs/user_manual/plugins/plugins_heatmap.rst
```

Deci, de ce am ales acest document?

1. It includes images, captions, headers, references and replacements.
2. Eu l-am scris, deci este mult mai ușor pentru mine să efectuez traducerea ;-)

The build process has created the English `.po` file which can be found here:

```
QGIS-Documentation/locale/en/LC_MESSAGES/docs/user_manual/plugins/plugins_heatmap.  
↳po
```

The equivalent Dutch `.po` file (basically a copy) can be found here:

```
QGIS-Documentation/locale/nl/LC_MESSAGES/docs/user_manual/plugins/plugins_heatmap.  
↳po
```

Along this file you will see a tiny `.mo` file which indicates that it does not hold any translations yet.

### 4.2.1 Traducerea pe Transifex

In order to translate using Transifex, you need to:

1. create an account on [Transifex](#) and join the [QGIS project](#).
2. Once you are part of a language team, click on the corresponding project (in this case [QGIS Documentation](#)). A list of available languages with their ratio of translation is displayed.

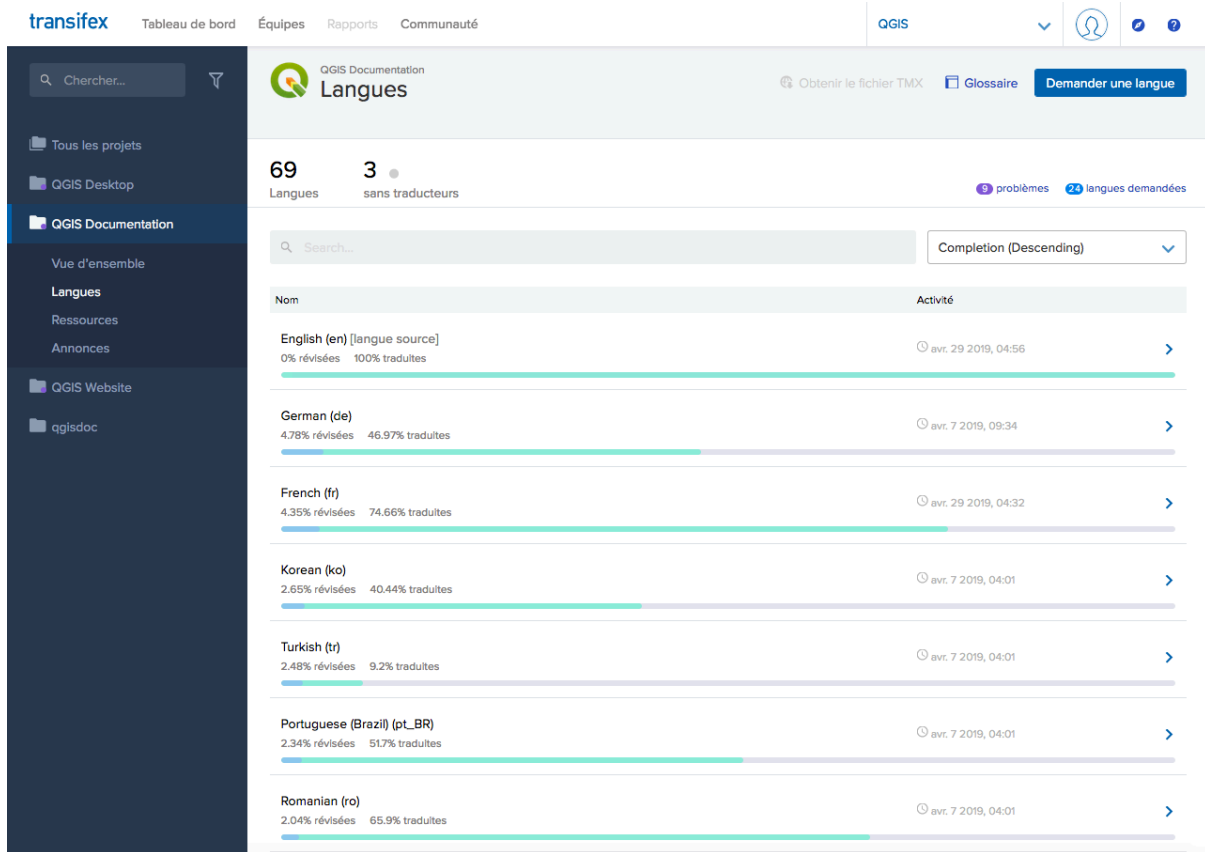


Fig. 4.1: Select language for translation in the Transifex menu

3. Hover over your language and click either:

- *View resources*: translatable .po files with their ratio of translation, number of strings and some more metadata are now displayed.
- or *Translate*: opens the interface of translation with all the available .po files

4. Identify the file you'd like to translate (in our case we are looking for the docs\_user-manual\_plugins\_plugins-heatmap, the heatmap plugin file) or any unfinished file and click on it: strings in the files are loaded and you can use the interface to filter, translate, suggest translation...

---

**Sfat:** For the documentation or the website, clicking the Fix me link in the footer of a page brings you directly to its corresponding translation page in Transifex.

---

5. All you need to do is select each text and translate following the *guidelines*.

For further information on the use of Transifex Web Editor, see <https://docs.transifex.com/translation/translating-with-the-web-editor>.

## 4.2.2 Traducere în Qt Linguist

With Qt Linguist, you need to:

1. manually grab the `.po` or `.ts` file(s). This can be achieved by downloading the file(s) either from Transifex platform or from the `locale/$language` folder of the source repository (in GitHub),
2. proceed to the translation locally
3. upload the modified files to their sources (Transifex or GitHub).

While downloading and uploading translatable files can be done with Transifex, it's not advised to use this process. Since there's no versioning system on Transifex, the file you upload will simply replace the existing one and potentially overwrite any modification made by others on the platform in the meantime.

When you open the file in Qt Linguist for the first time you will see the following dialog:



Fig. 4.2: Selectați limba pentru traducere în meniul linguist

Limba Țintă trebuie să fie completată corect. Limba Sursă poate fi lăsată așa cum este, cu limba POSIX și Țara/Regiunea pe Orice Țară.

When you press the *OK* button Qt Linguist is filled with sentences and you can start translating, see Fig. 4.3.

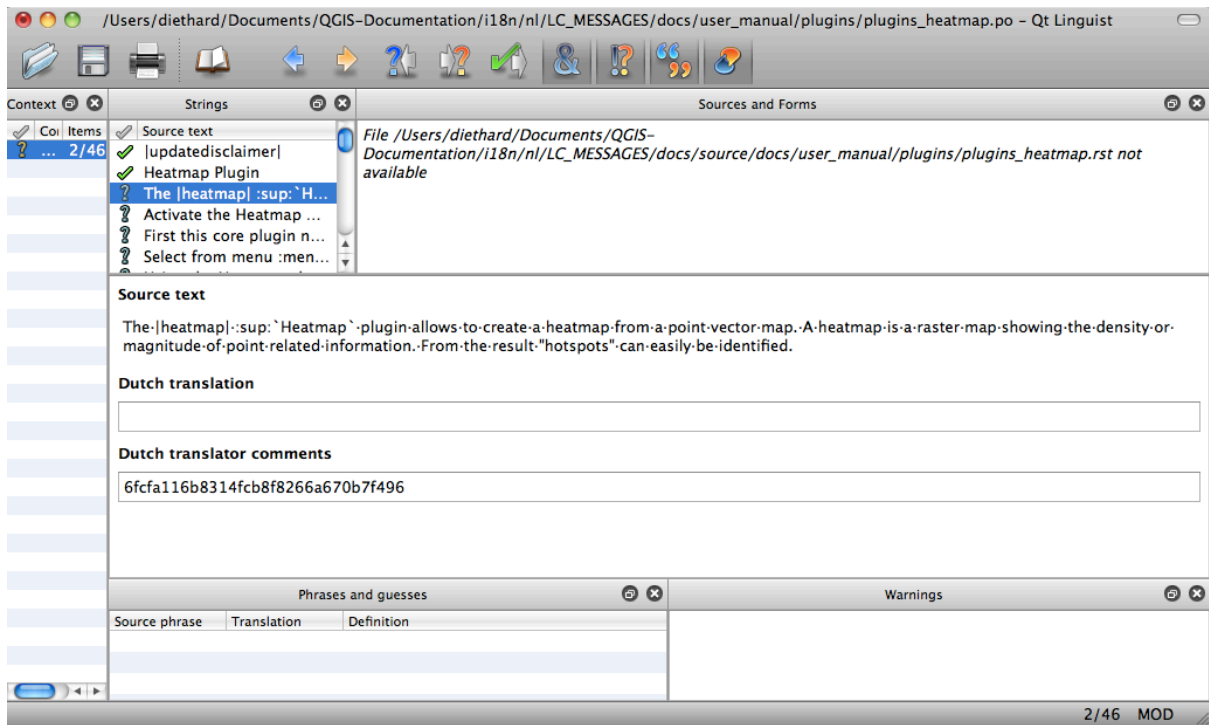







Fig. 4.3: Traducerea cu ajutorul meniului Linguist

În meniu veți vedea următoarele butoane, ușor de utilizat.

-  Butonul Translation Done Next este cel mai important. Dacă elementul are nevoie de traducere, introduceți o traducere în câmpul de text, apoi apăsați acest buton. Dacă elementul nu necesită traducere, lăsați gol câmpul de text și apăsați, de asemenea, acest buton, care indică faptul că elementul este în regulă, continuându-se cu următorul.
-  Butonul Goto Previous, poate fi folosit pentru a merge la elementul tradus anterior.
-  Butonul Goto Next, poate fi folosit pentru a merge la următorul element de tradus.
-  Butonul Next Todo, efectuează saltul la prima traducere care necesită o traducere. Este foarte util atunci când documentul original s-a schimbat și numai câteva expresii noi/modificate trebuie să fie traduse.
-  Butonul Previous Todo, caută înapoi și sare la primul element de traducere care necesită o traducere.

For further information on the use of Qt Linguist, see <https://doc-snapshots.qt.io/qt5-5.12/linguist-translators.html>

**Atenționare:** If you want to download content to translate from the source repository, never do this in the `master` branch. For translations there are always translation branches available, once a document is fully updated in English for a certain version. As an example, to translate the manual of QGIS 2.8, you have to use the `manual_en_v2.8` branch.

### 4.2.3 Traduceți un manual

Acum vom începe traducerea manualului pentru pluginul `heatmap`!

Traducerea celor mai multe propoziții ar trebui să fie simplă. Pe durata acestei sesiuni de traducere, vom sublinia părțile (expresiile `rst`) care necesită traducere.

Mai jos, vedem o propoziție de tradus, mai interesantă:

```
The |heatmap| :sup:`Heatmap` plugin allows to create a heatmap from a point vector map. A heatmap is a raster map showing the density or magnitude of point related information. From the result "hotspots" can easily be identified.
```

Această frază conține două declarații `rst`:

1. `|heatmap|` cuvintele dintre `|` sunt înlocuiri și nu ar trebui să fie traduse niciodată! Acesta, de exemplu, va fi înlocuit de pictograma plugin-ului `Heatmap`!
2. `:sup:`Heatmap``, expresia `:sup:` este o declarație de superpoziție, care imprimă textul următor, un pic mărit. Se folosește pentru a prezenta textele într-un balon, care apare la trecerea pe deasupra elementului din bara de instrumente, el putând arăta în mod diferit dacă a fost tradus în aplicația QGIS. În cazul limbii olandeze, nu a fost tradus!

Toate celelalte texte simple din această propoziție pot fi traduse!

Următorul element de tradus conține expresia `:ref:`, care este frecvent folosită pentru a face trimitere la o altă secțiune a manualului respectiv! Textul urmat de expresia `:ref:` nu ar trebui să fie schimbat, pentru că acesta reprezintă un identificator unic!

```
First this core plugin needs to be activated using the Plugin Manager (see Section :ref:`load_core_plugin`). After activation the heatmap icon |heatmap| can be found in the Raster Toolbar.
```

In this case `load_core_plugin` is a unique reference identifier placed before an `rst` item that has a caption. The `ref` statement will be replaced with the text of the header and turned into a hyperlink. When the header this reference is referring to is translated, all references to this header will be automatically translated as well.

Articolul următor conține eticheta `rst` `:menuselection:` urmat de textul afișat, în mod curent, într-un meniu din aplicația QGIS, acesta putând fi tradus în cerere și, prin urmare, ar trebui să fie schimbat atunci când este cazul.

```
Select from menu :menuselection:`View --> Toolbars --> Raster` to activate the Raster Toolbar when it is not yet activated.
```

La punctul de mai sus „`View ->`” este, de fapt, tradus ca „`Beeld ->`”, aceasta fiind traducerea olandeză utilizată din aplicația QGIS.

Un pic mai departe vom întâlni următoarele elemente greu de tradus:

```
The |heatmap| :sup:`Heatmap` tool button starts the Dialog of the Heatmap plugin (see :numref:`figure_heatmap_settings`).
```

It holds a reference to a figure `figure_heatmap_settings_`, and like a reference to a section this reference should not be changed!! The reference definition from the `rst`-document is not included in the `.po` file and can therefore not be changed. This means the reference to figures can not be translated. When HTML is created you will see `figure_heatmap_settings`. When a PDF document is created `figure_heatmap_settings_` is replaced with a figure number.

Următorul element de traducere cu atribute `rst` este următorul:

```
**Input Point dialog**: Provides a selection of loaded point vector maps.
```

Nu eliminați steluțele din linia de mai sus. Textul conținut între ele va fi transcris îngroșat. Adesea, textul este inclus chiar în dialog și poate fi, la fel de bine, tradus în aplicație.



Următoarea traducere conține eticheta rst :guilabel:.

When the |checkbox| :guilabel:`Advanced` checkbox is checked it will give access to additional advanced options.

Textul Avansat al etichetei poate fi tradus din aplicația QGIS și, probabil, chiar trebuie tradus!

Următorul element de tradus conține ``airports``. Apostrofurile sunt folosite pentru a atribui textului un alt font. În acest caz, este vorba de o valoare literală și nu are nevoie de traducere.

For the following example, we will use the ``airports`` vector point layer from the QGIS sample dataset (see :ref:`label\_sampledata`). Another excellent QGIS tutorial on making heatmaps can be found on [`https://www.qgistutorials.com`](https://www.qgistutorials.com)  
[`<https://www.qgistutorials.com/en/docs/creating\\_heatmaps.html>`](https://www.qgistutorials.com/en/docs/creating_heatmaps.html)\_.

This item also includes a hyperlink with an url and an external presentation. The url should of course be left intact, you are allowed to change the external text <https://www.qgistutorials.com> which is visible by the reader. Never remove the underscore at the end of the hyperlink which forms an essential part of it!!

#### 4.2.4 Sumarul regulilor pentru traducere

1. Nu schimbați textul dintre două caractere |, cum ar fi |bronze|, |checkbox|, |labels|, |selectString|, |addLayer| ... Acestea sunt etichete speciale, folosite pentru a substitui imaginile
2. Do not change references that start with roles like :ref:, :file:, :numref: unless they include a title. In that case, you can translate the title but keep unchanged the link (i.e., the text between < and >)

**Sfat:** When a title is provided for a reference, Transifex may display a number in the English source text in replacement of the link part. Click on the number in the source text to add the reference link next to the title being translated.

3. Nu schimbați referințe care se termină cu liniuțe de subliniere ca figure\_labels\_1\_
4. Nu modificați adresa hiperlegăturilor, însă puteți modifica descrierea lor externă. Lăsați neatinsă liniuța de subliniere de la sfârșit, neintroducând spațieri adiționale (>`\_)
5. Schimbați textul dintre ghilimele, care urmează după etichetele :sup:, :guilabel: și :menuselection:. Verificați dacă/cum sunt traduse în aplicația QGIS. Nu schimbați denumirea etichetelor.
6. Textul inclus între steluțe duble și apostrofurile duble indică adesea valori sau nume de câmpuri, uneori necesitând traducere, alteleori nu.
7. Aveți grijă să utilizați exact același (număr de) caractere speciale, cum ar fi ` , `` , \* , \*\* , : , similar textului sursă, . Acestea contribuie la cosmetizarea informațiilor furnizate
8. Nu puneți un spațiu, înainte sau după textul inclus între caractere speciale sau din cadrul etichetelor
9. Nu încheiați șirurile traduse cu un nou paragraf, în caz contrar, textul nu va fi tradus pe durata generării codului html.

Respectați regulile de mai sus iar documentul tradus va arăta foarte bine!

Pentru orice întrebare, vă rugăm să contactați [Echipele Comunității QGIS](#) sau [Echipele de Traducere QGIS](#).



- *Folosire*
- *Substituții comune*
  - *Pictogramele platformelor*
  - *Elementele meniului*
- *Pictogramele butoanelor barei de instrumente*
  - *Gestiunea straturilor și a ansamblului general*
  - *Fișier*
  - *Editare*
  - *Rezultatul identității*
  - *Digitizare simplă și avansată*
  - *Explorarea hărții și a atributelor*
  - *Selecția și Expresiile*
  - *Etichetele și Diagramele*
  - *Decorațiuni*
  - *Ajutorul*
  - *Culori*
- *Alte pictograme de bază*
- *Tabela de atribute*
- *Proiecții și Georeferențiere*
- *Print Layout*
- *Layer Properties*
- *Plugin-uri*
  - *Procesare*

- *Various Core Plugins*
- *Integrare GRASS*

## 5.1 Folosire

To ease the use of icons in QGIS manuals, replacements are defined for each icon in `/source/substitutions.txt` file at [QGIS-Documentation repository](#) and some of these substitutions are listed below. Thus, when you want to use an icon from QGIS application in the documentation there is a big chance that there is already a substitution that can/should be used.

În cazul în care nu există nici o substituție:

1. check the documentation repository whether the icon is available in `/static/common` folder. If no image, then you need to find and copy the icon image file from [QGIS repository](#) (often under [https://github.com/qgis/QGIS/blob/release-3\\_16/images/themes/default](https://github.com/qgis/QGIS/blob/release-3_16/images/themes/default) folder) and paste (in `.png` format) under `/static/common` folder. For convenience and update, it's advised to keep filename when possible.
2. create the reference to the substitution in the `/source/substitutions.txt` file following the example below. The replacement text should be in camelCase:






```
.. |splitLayer| image:: /static/common/split_layer.png
:width: 1.5em
```

3. run the `scripts/find_set_subst.py` script to update the substitution definitions in the `rst` files and include the new substitution(s).
4. (opțional) adăugați referința către pictogramă și către substituția acesteia din lista de mai jos.












## 5.2 Substituții comune

Mai jos sunt prezentate unele pictograme și substituțiile lor, pentru a fi utilizate la scrierea documentației. Pot fi folosite/găsite în multe locuri din manuale.

### 5.2.1 Pictogramele platformelor

Pictogramă	Substituție	Pictogramă	Substituție
	logo		
	kde		linux
	osx		win

## 5.2.2 Elementele meniului






Pictogramă	Substituție	Pictogramă	Substituție
	checkbox		unchecked
	radioButtonOn		radioButtonOff
	selectNumber		selectString
	selectColor		selectColorRamp
	tab		degrees
Display name <input type="text" value="lakes.shp"/>	inputText		slider

## 5.3 Pictogramele butoanelor barei de instrumente
























### 5.3.1 Gestiunea straturilor și a ansamblului general

Pictogramă	Substituție	Pictogramă	Substituție
	dataSourceManager		
	addOgrLayer		addDb2Layer
	addRasterLayer		addMssqlLayer
	addDelimitedTextLayer		addSpatialiteLayer
	addPostgisLayer		addOracleLayer
	addAfsLayer		addAmsLayer
	addMeshLayer		
	addVectorTileLayer		addXyzLayer
	addVirtualLayer		addWmsLayer
	addWcsLayer		addWfsLayer
	newVectorLayer		newSpatialiteLayer
	newGeoPackageLayer		createMemory
	newVirtualLayer		
	dbManager		gdal
	geoPackage		spatialite
	virtualLayer		wms
	wcs		wfs
	dbSchema		
	inOverview		addAllToOverview
	removeAllOverview		removeLayer
	showAllLayers		hideAllLayers
	showMapTheme		showSelectedLayers
	hideSelectedLayers		hideDeselectedLayers
	toggleAllLayers		toggleSelectedLayers
	addLayer		
	indicatorTemporal		indicatorNonRemovable
	indicatorEmbedded		indicatorFilter
	indicatorMemory		indicatorNoCRS
	indicatorBadLayer		favourites












### 5.3.2 Fișier

Pictogramă	Substituție	Pictogramă	Substituție
	fileNew		fileOpen
	fileSave		fileSaveAs
	fileExit		

### 5.3.3 Editare

Pictogramă	Substituție	Pictogramă	Substituție
	undo		redo
	editCopy		editPaste
	editCut		saveEdits
	editableEdits		
	circle2Points		circle2TangentsPoint
	circle3Points		circle3Tangents
	circleCenterPoint		ellipseCenter2Points
	ellipseCenterPoint		ellipseExtent
	ellipseFoci		rectangle3PointsDistance
	rectangle3PointsProjected		rectangleCenter
	rectangleExtent		regularPolygon2Points
	regularPolygonCenterCorner		regularPolygonCenterPoint

### 5.3.4 Rezultatul identității

























Pictogramă	Substituție	Pictogramă	Substituție
	expandTree		collapseTree
	expandNewTree		formView
	deselectAll		editCopy
	filePrint		
	identifyByRectangle		identifyByPolygon
	identifyByFreehand		identifyByRadius

### 5.3.5 Digitizare simplă și avansată























Pictogramă	Substituție	Pictogramă	Substituție
	cad		cadConstruction
	cadParallel		cadPerpendicular
	toggleEditing		allEdits
	tracing		snapping
	capturePoint		capturePolygon
	captureLine		deleteSelectedFeatures
	circularStringCurvePoint		circularStringRadius
	vertexTool		vertexToolActiveLayer
	moveFeature		moveFeatureCopy
	moveFeatureLine		moveFeatureCopyLine
	moveFeaturePoint		moveFeatureCopyPoint
	rotateFeature		rotatePointSymbols
	offsetCurve		offsetPointSymbols
	simplifyFeatures		reshape
	addRing		addPart
	fillRing		
	deleteRing		deletePart
	mergeFeatures		mergeFeatAttributes
	splitFeatures		splitParts
	reverseLine		




































### 5.3.6 Explorarea hărții și a atributelor

Pictogramă	Substituție	Pictogramă	Substituție
	pan		panToSelected
	zoomIn		zoomOut
	zoomActual		zoomFullExtent
	zoomToLayer		zoomToSelected
	zoomLast		zoomNext
	refresh		
	identify		mapTips
	showBookmarks		newBookmark
	measure		measureArea
	measureAngle		
	newMap		new3DMap
	tiltUp		tiltDown
	3dNavigation		play








### 5.3.7 Selecția și Expresiile

Pictogramă	Substituție	Pictogramă	Substituție
	selectRectangle		selectPolygon
	selectFreehand		selectRadius
	selectAll		deselectAll
	invertSelection		expressionSelect
	deselectActiveLayer		algorithmSelectLocation
	selectAllTree		select
	formSelect		dataDefined
	expression		dataDefineOn
	dataDefineExpressionOn		dataDefineError
	dataDefineExpressionError		
	addExpression		
	expressionFilter		filterMap






### 5.3.8 Etichetele și Diagramele

Pictogramă	Substituție	Pictogramă	Substituție
	labeling		labelingNone
	labelingRuleBased		labelingObstacle
	piechart		diagramNone
	text		histogram
	stackedBar		
	annotation		textAnnotation
	formAnnotation		htmlAnnotation
	svgAnnotation		autoPlacement
	labelbackground		labelbuffer
	labelformatting		labelplacement
	labelshadow		render
	labelcallout		
	labelAnchorCenter		labelAnchorCustom
	labelAnchorEnd		labelAnchorStart
	pinLabels		showHideLabels
	moveLabel		rotateLabel
	showPinnedLabels		showUnplacedLabel
	changeLabelProperties		

### 5.3.9 Decorațiuni

Pictogramă	Substituție	Pictogramă	Substituție
	copyrightLabel		addGrid
	titleLabel		northArrow
	scaleBar		addMap
	addImage		
























### 5.3.10 Ajutorul

Pictogramă	Substituție	Pictogramă	Substituție
	helpContents		qgisHomePage
	success		
	helpSponsors		contextHelp
























### 5.3.11 Culori

Pictogramă	Substituție	Pictogramă	Substituție
	colorBox		colorPicker
	colorSwatches		colorWheel













## 5.4 Alte pictograme de bază

Pictogramă	Substituție	Pictogramă	Substituție
	arrowDown		arrowUp
	signPlus		signMinus
	projectProperties		options
	interfaceCustomization		keyboardShortcuts
	copyrightLabel		northArrow
	scaleBar		tracking
	gpsImporter		gpsTrackBarChart
	folder		extents
	settings		start
	3dconfigure		deleteSelected
	browserExpand		browserCollapse
	codeEditor		


## 5.5 Tabela de atribute

Pictogramă	Substituție	Pictogramă	Substituție
	openTable		selectedToTop
	selectAll		invertSelection
	panToSelected		zoomToSelected
	copySelected		editPaste
	expressionSelect		deleteSelectedFeatures
	newAttribute		deleteAttribute
	newTableRow		calculateField
	refresh		formView
	conditionalFormatting		multiEdit
	dock		actionRun
	duplicateFeature		
	panTo		highlightFeature

## 5.6 Proiecții și Georeferențiere









































Pictogramă	Substituție	Pictogramă	Substituție
	geographic		crs
	customProjection		setProjection
	projectionDisabled		projectionEnabled
	transformation		
	georefRun		pencil
	linkQgisToGeoref		linkGeorefToQgis
	fullHistogramStretch		

## 5.7 Print Layout





















































Pictogramă	Substituție	Pictogramă	Substituție
	newLayout		layoutManager
	duplicateLayout		
	newReport		newPage
	atlasSettings		atlas
	filePrint		saveMapAsImage

continues on next page

Tabelul 5.1 – continuare din pagina precedentă































Pictogramă	Substituție	Pictogramă	Substituție
	saveAsSVG		saveAsPDF
	addBasicShape		addBasicCircle
	addBasicTriangle		addBasicRectangle
	addNodesShape		editNodesShape
	addPolygon		addPolyline
	addArrow		northArrow
	add3DMap		addMap
	addLegend		addHtml
	addManualTable		addTable
	addImage		addMarker
	label		scaleBar
	select		moveItemContent
	setToCanvasScale		setToCanvasExtent
	viewScaleInCanvas		viewExtentInCanvas
	raiseItems		lowerItems
	moveItemsToTop		moveItemsToBottom
	alignLeft		alignRight
	alignHCenter		alignVCenter
	alignTop		alignBottom
	resizeShortest		resizeTallest
	resizeNarrowest		resizeWidest
	resizeSquare		
	lockItems		unlockAll
	locked		unlocked
	lockedRepeat		lockedGray
	groupItems		

## 5.8 Layer Properties

Pictogramă	Substituție	Pictogramă	Substituție
	symbology		labeling
	sourceFields		general
	metadata		action
	display		rendering
	join		diagram
	labelmask		temporal
	legend		dependencies
	3d		system
	editMetadata		overlay
	digitizing		auxiliaryStorage
	history		stylePreset
	search		pyramids
	transparency		rasterHistogram
	singleSymbol		nullSymbol
	graduatedSymbol		categorizedSymbol
	25dSymbol		ruleBasedSymbol
	invertedSymbol		heatmapSymbol
	pointDisplacementSymbol		pointClusterSymbol
	meshcontours		meshcontoursoff
	meshvectors		meshvectorsoff
	meshframe		
	sum		sort
	paintEffects		mapIdentification
	styleManager		iconView
	joinNotEditable		joinedLayerNotEditable
	joinHasNotUpsertOnEdit		filterTableFields
	symbologyEdit		
	sharingImport		sharingExport

















## 5.9 Plugin-uri

### 5.9.1 Procesare







Pictogramă	Substituție	Pictogramă	Substituție
	processing		processingModel
	processingHistory		processingResult
	processSelected		processingHelp
	saveAsPython		processingOutput
	qgsProjectFile		addToProject
	integer		
	mean		layerExtent
	randomSelection		vectorGrid
	convexHull		buffer
	intersect		union
	symDifference		clip
	difference		dissolve
	checkGeometry		exportGeometry
	delaunay		centroids
	toLines		extractNodes
	splitLayer		heatmap
	showRasterCalculator		showMeshCalculator

### 5.9.2 Various Core Plugins

Standard, cu instalare minimală, dar neîncărcate de către instalarea inițială

Pictogramă	Substituție	Pictogramă	Substituție
	showPluginManager		installPluginFromZip
	pythonFile		runConsole
	showEditorConsole		clearConsole
	offlineEditingCopy		offlineEditingSync
	plugin		interpolation
	gdalScript		metasearch
	geometryChecker		topologyChecker
	fromSelectedFeature		sqlQueryBuilder

### 5.9.3 Integrare GRASS

Pictogramă	Substituție	Pictogramă	Substituție
	grass		grassRegion
	grassTools		grassNewMapset
	grassOpenMapset		grassCloseMapset